

CLASSIFICATION


Item number:	
Membrane type	Tubular filtration
Operation mode	Inside-Out cross flow filtration
Pore size	100 - 50 - 20 nm
pH range	1-14 pH

MATERIAL

Membrane	Al ₂ O ₃ (Alumina Oxide) ceramic
Porosity	35-40%
Operation temperature	5-100 °C
Operation pressure	< 10 Bar
pH range	Application specific

DIMENSIONS

	CRM251935	CRM301940	CRM4019
Membrane surface area	0,25 m ²	0,24 m ²	0,50 m ²
Length	1178 mm	1016 mm	1200 mm
OD	25 mm	30 mm	40 mm
Channel ID	3,5 mm	4 mm	6 mm
Weight	1,5 kg	1,8 kg	1,9 kg

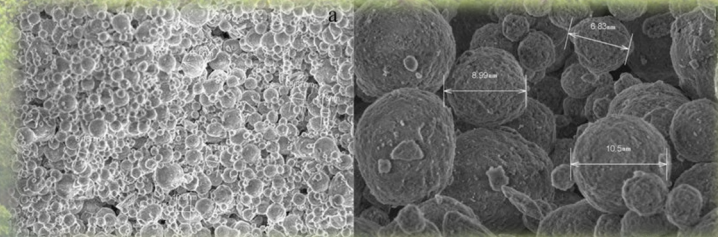

Magnification 100 nm and 10 nm